





MIXY - THE RATIONAL

FACTS

Type: Mixy plastering machine

Use: Renovation, small and large construction sites

Innovation: Single phase operation, 2.2 – 3.0 kW

FEATURES

- For interior and exterior works
- Processing glue, ridge plaster, flowing screed, indoor and outdoor plaster
- Light weight, easy to assemble and dismount
- High quality components
- Single phase operation with condenser (230 V – 2.2 kW) or frequency inverter (230 V – 3.0 kW)
- Frequency inverter for more power in single phase mode
- Frame fitted with 4 wheels for increased flexibility






Booster pump
(standard)



Protective cover



Easily accessible
water armature

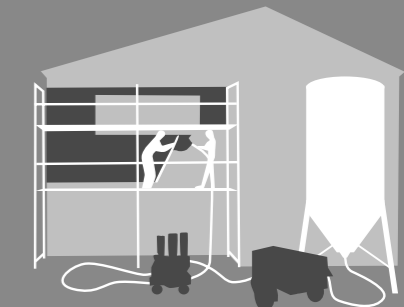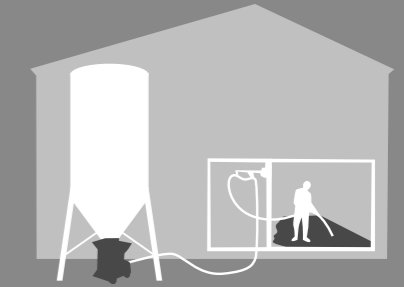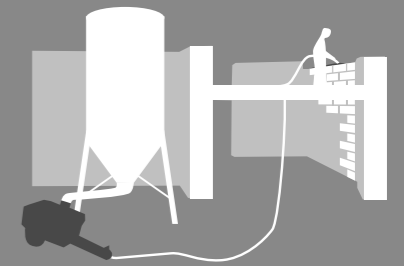

TECHNICAL DATA

Power unit Mod. 1	230 V 50 Hz 2,2 kW
Electrical drive	42 V
Pump	D4 - ECO
Max. output*	approx. 16 lt/min
Transport pressure	15 bar
Range*	approx. 10 m
Compressor	180 lt/min
Water pressure	3 bar

MEASURE + WEIGHT

Length	1640 mm
Width	600 mm
Max. height	1190 mm
Height of opening	1010 mm
Total weight	202 kg

MACHINERY

Mortar hose	DN 25, 10 m, 40 bar
Air hose 1/2"	10 m
Spray gun	DN 25
Toolset	
Cleaning toolkit	

* Approximate values that may vary according to type and consistency of the materials used