



# DeviBench<sup>®</sup>


Complete system for hole deviation measurement and scanning of the face.

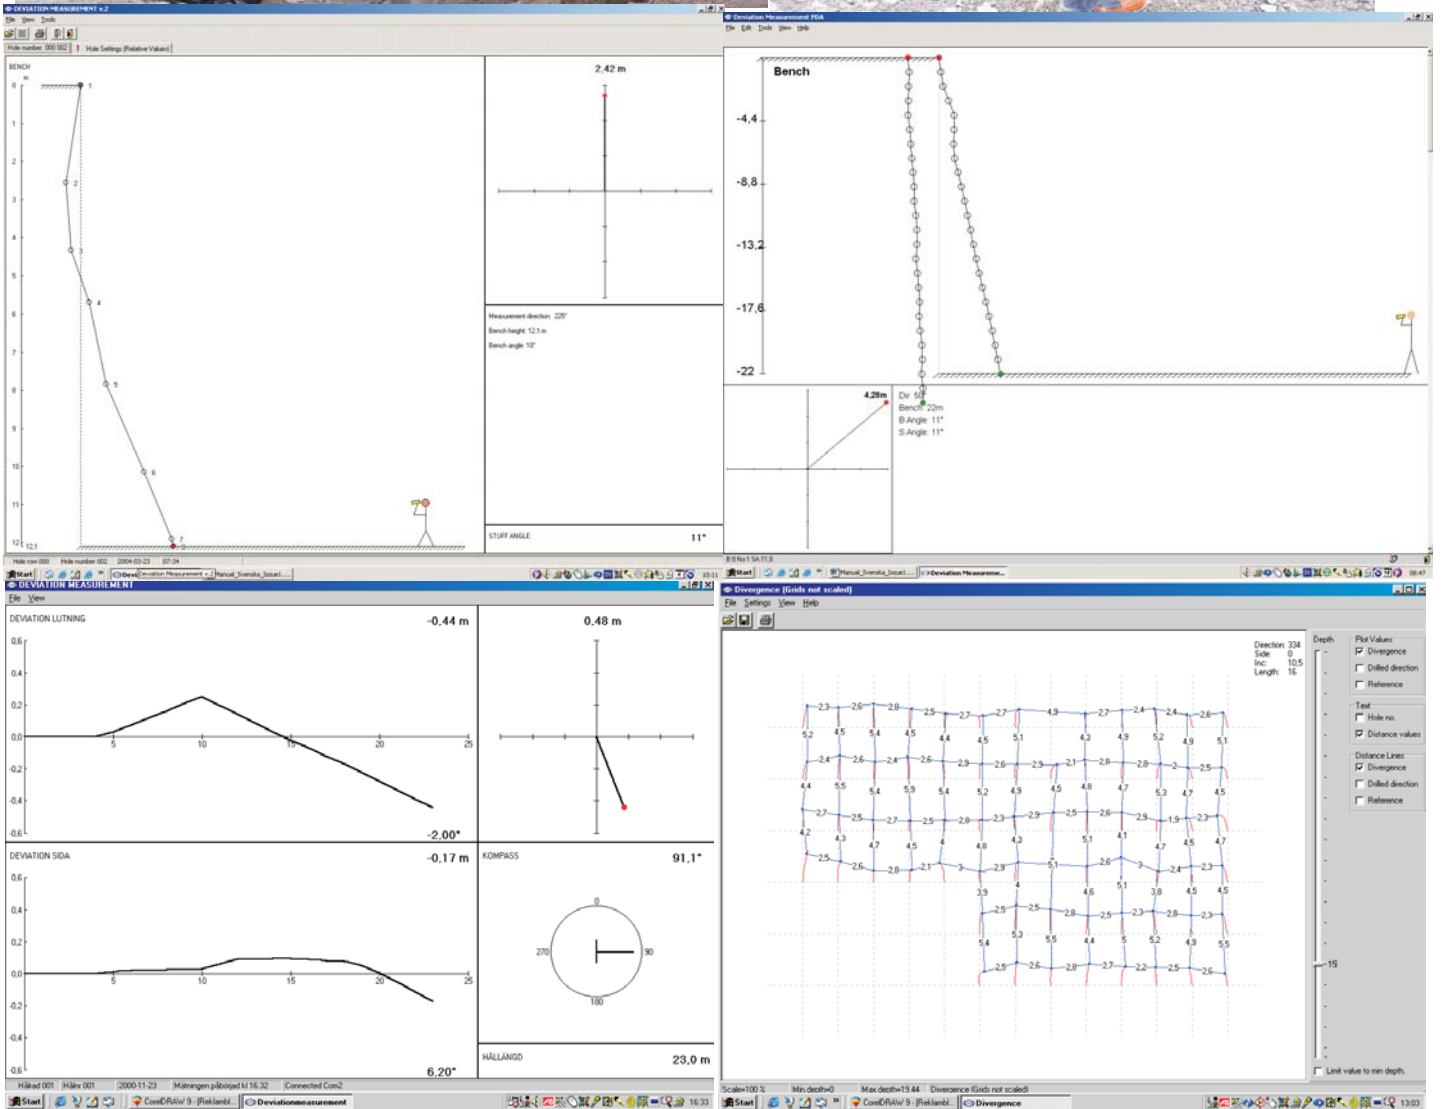


Measure hole deviation

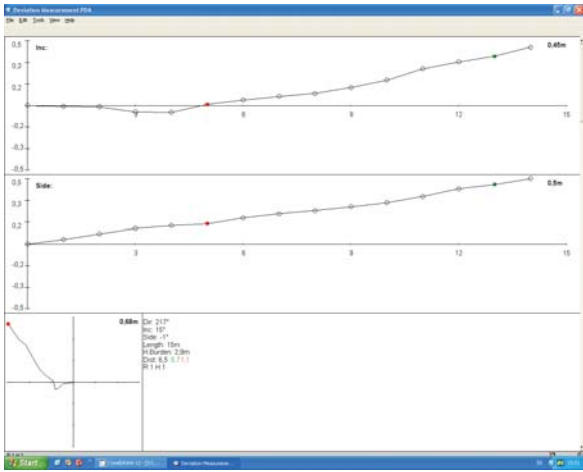

Scan the face

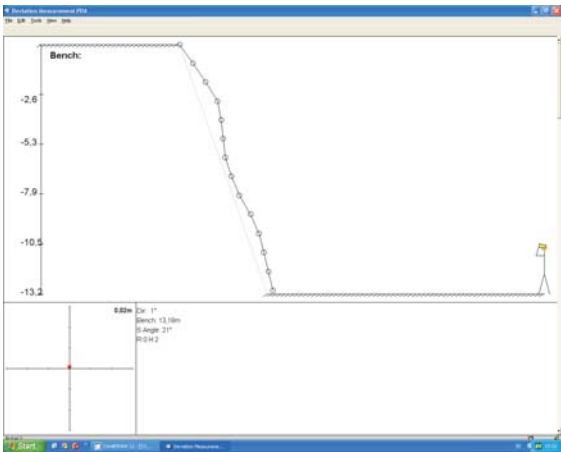

Establish the burden.

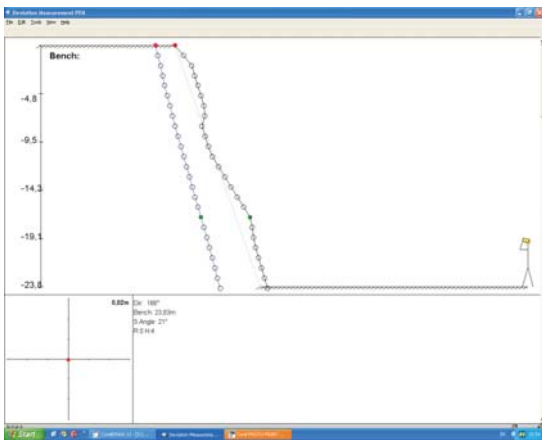

No.	Depth	H.Dev	V.Dev	Dist
1	0	0	0	1.0
2	1	0	0,45	2,486
3	2	0	0,897	3,054
4	3	0	0,81	3,144
5	4	0	0,738	3,27
6	5	0	0,657	3,286
7	6	0	0,566	3,347
8	7	0	0,277	3,18
9	8	0	-0,381	2,856
10	9	0	-0,445	2,71
11	10	0	-0,591	2,746
12	11	0	-0,478	2,895
13	12	0	-0,246	3,234
14	13	0	-0,014	3,571
15	14	0	0,218	3,906
16	15	0	0,459	4,255
17	16	0	0,701	4,616
18	17	0	0,956	4,952
19	18	0	0,771	4,879
20	19	0	0,51	4,741
21	20	0	0,242	4,712
22	21	0	0,265	4,747
23	22	0	0,172	4,782
24	23	0	0,078	4,849
25	24	0	-0,016	4,871

General data:

- Battery Capacity 4 Hour use
- Working temperature -20 - +50 °C
- Environmental protection IP65
- Accuracy ± 1 Degrees
- Probe length 1.5 Meter
- Probe Diameter 45 mm
- Cable length 40 Meter
- Angle range ± 30 Degrees
- Measurement Range Scanner 300 Meter



**TRANSTRONIC AB**