





M35 - THE STRONG

FACTS

Type: Continuous mixer M35

Application: Processing of premixed mortar and plaster

Innovation: Optimized processing of heavy materials

FEATURES




- The mixing of premixed mortar and plaster
- Possible installation of various transportation screws
- Variable output
- The seals and spare parts are compatible with the continuous mixer "M40"
- Feeding with bags or from transport systems MD or MB over the feedhood



Feedhood for the M35



Water armature with water pump (standard)

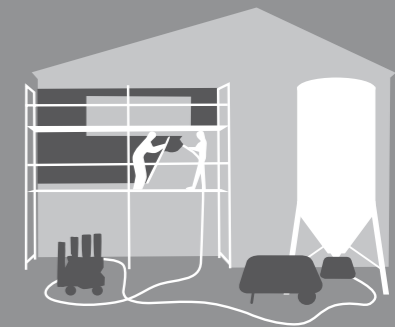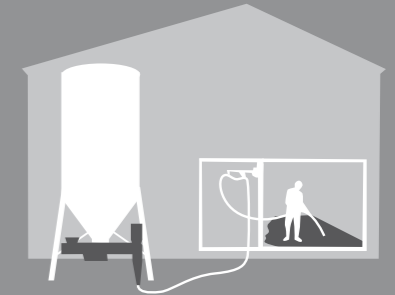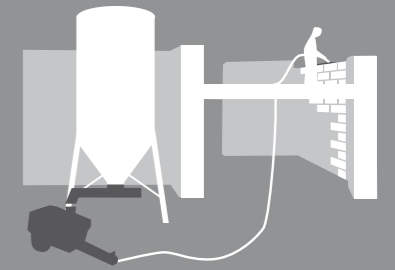

TECHNICAL DATA

Voltage	400 V 50 Hz
Engine	5,5 kW
Control voltage	42 V
Capacity*	approx. 35 – 70 l
Water pressure	3 bar

MEASURE + WEIGHT

Length	2060 mm
Width	660 mm
Height	1130 mm
H incl. feedhood	1630 mm
Weight	203 kg

MACHINERY

Container for materials incl. bag cutter
Transport and dosing screw
Frame with 2 wheels
Water armature
Control panel
Water pump

* Approximate values that may vary according to type and consistency of the material used